



Niloé™ Step Cover plates

Cat. No(s): 8 641 61/71/72/73/74/75 - 8 643 61/71/72/73/74/75
8 645 61/71/72/73/74/75 - 8 646 61/71/72/73/74/75
8 647 71/72/73/74/75 - 8 648 71/72/73/74/75
8 649 71/72/73/74/75



8 64X 61





8 64X 72

1. USE

Faceplates for Niloé Step from 1 to 5 gangs wiring accessories.
Available in several colours.


2. RANGE

1-gang plates

	1-gang plate with label holder	
	○ White	8 641 61
	● Aluminium	8 643 61
	● Black	8 645 61
	● Sand	8 646 61
	○ White	8 641 71
	● Aluminium	8 643 71
	● Black	8 645 71
	● Sand	8 646 71
	● Copper	8 647 71
	● Brushed aluminium	8 648 71
	● Dark wood	8 649 71

2-gang plates


71 mm spacing - horizontal and vertical

	○ White	8 641 72
	● Aluminium	8 643 72
	● Black	8 645 72
	● Sand	8 646 72
	● Copper	8 647 72
	● Brushed aluminium	8 648 72
	● Dark wood	8 649 72

2. RANGE (continued)


3-gang plates

71 mm spacing - horizontal and vertical

	○ White	8 641 73
	● Aluminium	8 643 73
	● Black	8 645 73
	● Sand	8 646 73
	● Copper	8 647 73
	● Brushed aluminium	8 648 73
	● Dark wood	8 649 73


4-gang plates

71 mm spacing - horizontal and vertical

	○ White	8 641 74
	● Aluminium	8 643 74
	● Black	8 645 74
	● Sand	8 646 74
	● Copper	8 647 74
	● Brushed aluminium	8 648 74
	● Dark wood	8 649 74

5-gang plates

71 mm spacing - horizontal and vertical

	○ White	8 641 75
	● Aluminium	8 643 75
	● Black	8 645 75
	● Sand	8 646 75
	● Copper	8 647 75
	● Brushed aluminium	8 648 75
	● Dark wood	8 649 75

Niloé™ Step Cover plates

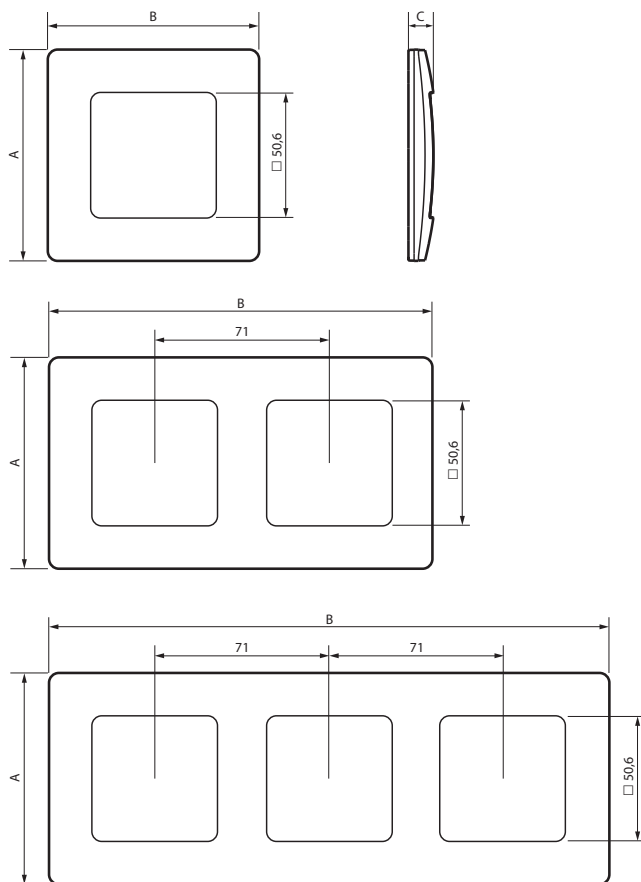
Cat. No(s): 8 641 61/71/72/73/74/75 - 8 643 61/71/72/73/74/75

8 645 61/71/72/73/74/75 - 8 646 61/71/72/73/74/75

8 647 71/72/73/74/75 - 8 648 71/72/73/74/75

8 649 71/72/73/74/75

3. OVERALL DIMENSIONS (mm)



	A	B	C
1-gang	86	86	10
2-gang 71 mm fixing centres	86	157	10
3-gang 71 mm fixing centres	86	228	10
4-gang 71 mm fixing centres	86	299	10
5-gang 71 mm fixing centres	86	370	10

4. TECHNICAL CHARACTERISTICS

■ 4.1 Materials

Matt surface appearance

Material: - ABS plate

- Halogen-free

- UV resistant

Self-extinguishing:

+ 850°C/30 s for insulating parts holding live parts in place

+ 650°C/30 s for other parts made of insulating materials

■ 4.2 Climatic characteristics

Storage and usage temperature: - 5°C to + 35°C

5. CLEANING

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Caution: An initial test is required for the use of other special maintenance products.