




Product Datasheet

06 Downlights Fixed LED>The Chrome Bezel Range Aluminium

10124/G/W

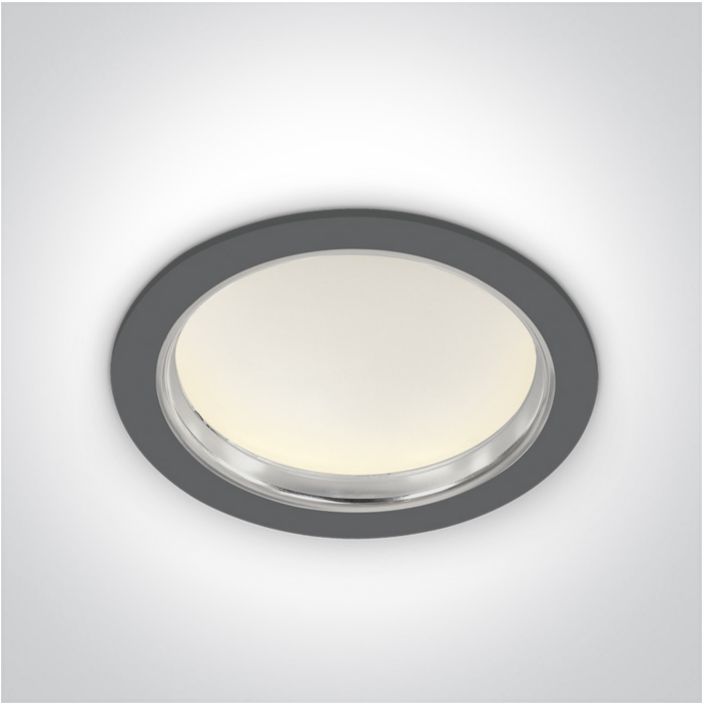

24W SMD LED recessed downlight, chrome bezel range, IP44.

Complete with 600mA driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions



Physical Specification

Item Group	06 Downlights Fixed LED
Family	The Chrome Bezel Range Aluminium
Order Code	10124/G/W
Colour	Grey
Material	Aluminium
Shape	Circular
Height	125mm
Diameter	238mm
Cutout Hole Diameter	210mm
Recessed Ceiling	Yes
Depth Required	160mm
Indoor	Yes

Electrical Characteristics

Gear	Built In
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	24W
IP Rating	IP44
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	600mA
Voltage	36V
Power(Watts)	21,6W
IP Rating	IP44
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Sanan
LED Number	48
F Mark	

Gear	
Gear Type	Led Driver
Input Voltage	220-240V

50 Hz
60 Hz
Power(Watts)
Power Factor
Constant Current
600mA
IP Rating
Safety Class
Dimmable
Ambient Temp
Operating Temp
Housing Material
Output Terminal
Brand

Yes
Yes
18-24W
0,9
Yes
30-40V
IP20

No
50°
80°
Plastic
Cable
Kegu

Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Beam Angle
Illumination Diagram

3000K
1450lm
60,41lm/W
80
120°


Packing Info

Box Length
Box Width
Box Height
Box Weight
Pcs/Carton
Barcode

24,5cm
24,5cm
12,5cm
0,760kg
8
5291889034179

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes

switch to
one light!

