



Product Datasheet

04 Recessed Spots Adjustable LED>The 12W COB Range

51112/AL/W



12W COB LED Recessed Adjustable Spot.

Requires 700mA driver.


Complies with standard EN60598-1 and any other specific standards




Downloads



Dimensions

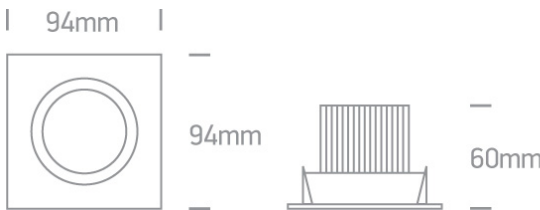

Gallery

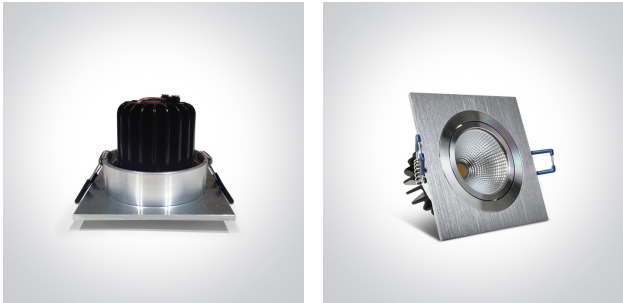

Must be ordered separately



89015A



89015AT

Physical Specification

Item Group	04 Recessed Spots Adjustable LED
Family	The 12W COB Range
Order Code	51112/AL/W
Colour	Aluminium
Material	Natural Aluminium
Shape	Rectangular
Length	94mm
Width	94mm
Height	60mm
Cutout Hole Diameter	80mm
Recessed Ceiling	Yes
Depth Required	90mm
Indoor	Yes
Adjustable	1 Direction

Electrical Characteristics

Fitting	
Input Type	Constant Current
Input Current	700mA
Voltage	14-16V
Safety Class	III
Power(Watts)	12W
IP Rating	IP20

Light Source
LED Type
LED Brand
LED Number
Cable Length
F Mark

LED built in

Завантажено з e27.com.ua

COB

Epistar

1

40cm



Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Beam Angle
Illumination Diagram

3000K
1100lm
91,67lm/W
80
38°


Packing Info

Box Length
Box Width
Box Height
Box Weight
Pcs/Carton
Barcode
HS Code

11cm
9cm
9cm
0,304Kg
50
5291889042525
9405409900

Warranty

2 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

